




KEYTEC, INC.

A global leader of touch-interactive technology since 1987.



www.magictouch.com

Magic Touch Add-On Kit KTMT-1700

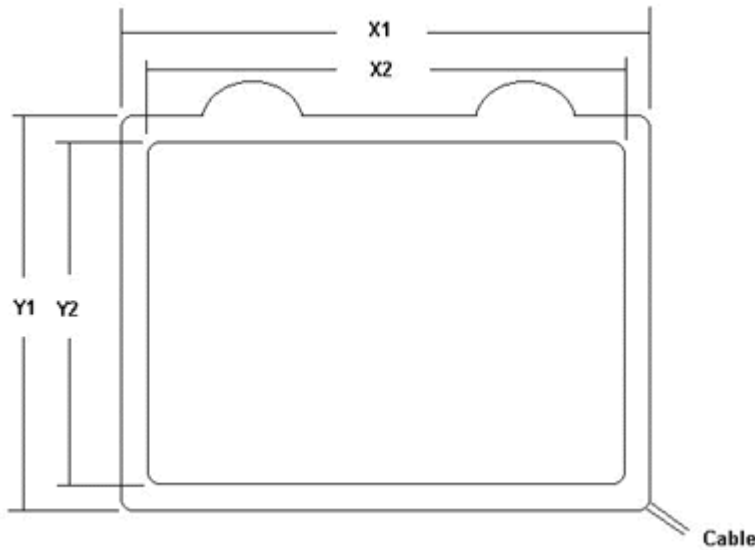

X1 = 14.75" (375 mm), Y1 = 12.25" (311 mm), X2 = 13.5" (343 mm), Y2 = 10.75" (273 mm).
Thickness = 0.55" (14 mm).



Add-on touch screen for 16-17" LCD & CRT monitor.



USB-XD controller for USB port interface. Black or beige color.



ProE-X controller for serial port interface. Black or beige color.



6-foot (180 cm) cable attached to touch screen. Extension cable available.

| Part Number | Port Required | Color | Included Drivers |
|----------------------|--|--------|---|
| KTMT-1700-USB | USB | Beige | Windows 98, ME, 2000, XP, Vista, Linux. |
| KTMT-1700-ProE | Com1 or Com2 | Beige | Windows 95, NT4.0, 98, ME, 2000, XP, Vista, Linux. |
| KTMT-1700-USB-M | USB | Beige | Mac OS 9-10. Free download Windows/Linux drivers. |
| KTMT-1700-USB/B | USB | Black | Windows 98, ME, 2000, XP, Vista, Linux. |
| KTMT-1700-ProE/B | Com1 or Com2 | Black | Windows 95, NT4.0, 98, ME, 2000, XP, Vista, Linux. |
| KTMT-1700-USB-M/B | USB | Black | Mac OS 9-10. Free download Windows/Linux drivers. |
| KTMT-1700-USB/S | USB | Silver | Windows 98, ME, 2000, XP, Vista, Linux. |
| KTMT-1700-ProE/S | Com1 or Com2 | Silver | Windows 95, NT4.0, 98, ME, 2000, XP, Vista, Linux. |
| KTMT-1700-USB-M/S | USB | Silver | Mac OS 9-10. Free download Windows/Linux drivers. |
| Accessories Included | Driver CD, User's Manual, Stylus, Cleaning Cloth, Warranty Card. | | |
| Warranty | Touch Screen Panel: 1-year parts/labor plus 2 more years labor only. Controller: 3-year parts/labor. | | |
| Support | Life-time free technical support and driver upgrade. | | |

| | |
|------------------------------|---|
| SPECIFICATION: | |
| TECHNOLOGY | Resistive analog touch screen. |
| SPACER | Invisible spacer - patented technology |
| LIGHT TRANSMISSION | 80% nominal |
| SCRATCH RESISTANCE | 3H pencil hardness. |
| TOUCH RESOLUTION | 4096 x 4096 (USB-XD) or 4096 x 4096 (ProE-X) |
| INTERFACE CONTROLLER | External controllers: PC - USB port or serial port. Apple - USB port. |
| OPERATING SYSTEMS | Windows 95, 98, ME, 2000, XP, Vista, NT4.0., Linux, Apple OS 8 to 10. |
| DRIVER | Mouse emulation driver. |
| ACTIVATION FORCE | 50-120 grams per square centimeter. |
| RESPONSE TIME | 10 msec maximum. |
| POSITION ACCURACY | 3 mm maximum error. |
| TOUCH MODE | Mouse click, double click, drag, right click. |
| OPERATING TEMPERATURE | -10 to 70 degrees C. |
| STORAGE TEMPERATURE | -30 to 85 degrees C. |
| HUMIDITY | Pass 40 degrees C, 95% RH for 96 hours. |
| CHEMICAL RESISTANCE | Excellent to alcohol, acetone, grease, and general household detergent. |
| DURABILITY | 3,000,000 touches per point minimum. |

KEYTEC, INC. 520 Shepherd Drive, Garland, TX, 75042 USA 1-800-MAGIC-89 sales@magictouch.com www.magictouch.com