




KEYTEC, INC.

A global leader of touch-interactive technology since 1987.



www.magictouch.com

Magic Touch Add-On Kit KTMT-1921

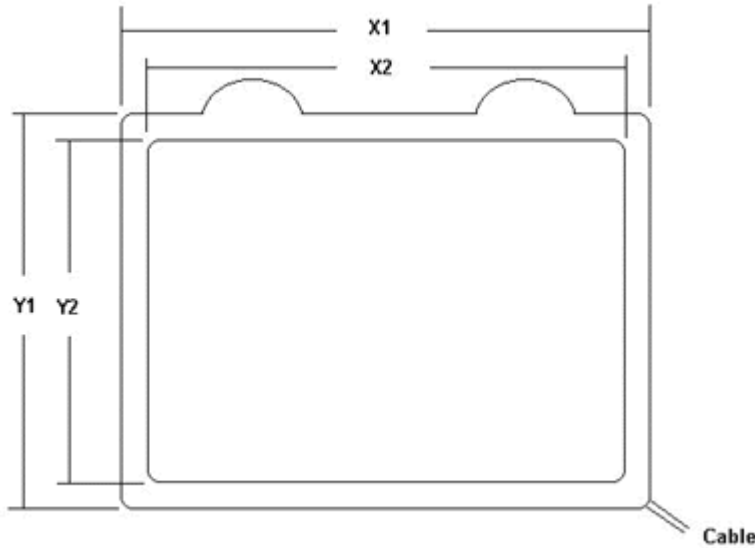

X1 = 17.87" (454 mm), Y1 = 14.13" (359 mm), X2 = 17" (431.8 mm), Y2 = 13" (330.2 mm).
Thickness = 0.55" (14 mm).



Add-on touch screen for 19-21" LCD & CRT monitor.



USB-XD controller for USB port interface. Black or beige color.



ProE-X controller for serial port interface. Black or beige color.



6-foot (180 cm) cable attached to touch screen. Extension cable available.

Part Number	Port Required	Color	Included Drivers
KTMT-1921-USB	USB	Beige	Windows 98, ME, 2000, XP, Vista, Linux.
KTMT-1921-ProE	Com1 or Com2	Beige	Windows 95, NT4.0, 98, ME, 2000, XP, Vista, Linux.
KTMT-1921-USB-M	USB	Beige	Mac OS 9-10. Free download Windows/Linux drivers.
KTMT-1921-USB/B	USB	Black	Windows 98, ME, 2000, XP, Vista, Linux.
KTMT-1921-ProE/B	Com1 or Com2	Black	Windows 95, NT4.0, 98, ME, 2000, XP, Vista, Linux.
KTMT-1921-USB-M/B	USB	Black	Mac OS 9-10. Free download Windows/Linux drivers.
KTMT-1921-USB/S	USB	Silver	Windows 98, ME, 2000, XP, Vista, Linux.
KTMT-1921-ProE/S	Com1 or Com2	Silver	Windows 95, NT4.0, 98, ME, 2000, XP, Vista, Linux.
KTMT-1921-USB-M/S	USB	Silver	Mac OS 9-10. Free download Windows/Linux drivers.
Accessories Included	Driver CD, User's Manual, Stylus, Cleaning Cloth, Warranty Card.		
Warranty	Touch Screen Panel: 1-year parts/labor plus 2 more years labor only. Controller: 3-year parts/labor.		
Support	Life-time free technical support and driver upgrade.		

SPECIFICATION:	
TECHNOLOGY	Resistive analog touch screen.
SPACER	Invisible spacer - patented technology
LIGHT TRANSMISSION	80% nominal
SCRATCH RESISTANCE	3H pencil hardness.
TOUCH RESOLUTION	4096 x 4096 (USB-XD) or 4096 x 4096 (ProE-X)
INTERFACE CONTROLLER	External controllers: PC - USB port or serial port. Apple - USB port.
OPERATING SYSTEMS	Windows 95, 98, ME, 2000, XP, Vista, NT4.0., Linux, Apple OS 8 to 10.
DRIVER	Mouse emulation driver.
ACTIVATION FORCE	50-120 grams per square centimeter.
RESPONSE TIME	10 msec maximum.
POSITION ACCURACY	3 mm maximum error.
TOUCH MODE	Mouse click, double click, drag, right click.
OPERATING TEMPERATURE	-10 to 70 degrees C.
STORAGE TEMPERATURE	-30 to 85 degrees C.
HUMIDITY	Pass 40 degrees C, 95% RH for 96 hours.
CHEMICAL RESISTANCE	Excellent to alcohol, acetone, grease, and general household detergent.
DURABILITY	3,000,000 touches per point minimum.

KEYTEC, INC. 520 Shepherd Drive, Garland, TX, 75042 USA 1-800-MAGIC-89 sales@magictouch.com www.magictouch.com