



KEYTEC, INC.

A global leader of touch-interactive technology since 1987.



520 Shepherd Drive, TX 75042, USA Tel 1-800-624-4289 (US toll free) or 1-972-272-7555 Fax 972-272-7501 Email sales@magictouch.com

Mounting instructions for KEYTEC'S large-size add-on touch screens

Note: It requires two people to do the mounting to avoid any accidental damages.



<< 1. There are two hangers. Attach them to top two corners. The cable is typically located at lower right corner unless otherwise specified by the customer.




>>

2. Hang the touch screen up to the display. Use the screws on hangers to adjust the position of the touch screen to make sure its active area covers the display's view area.




3. There are two pairs of Velcro straps for tightening the touch screen to the back of the display.

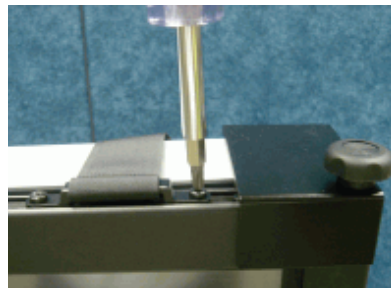

4. Screw in the short Velcro straps on top of the frame next to the hanger, and the long Velcro straps at the bottom of the frame. Pull both Velcro straps to the back of the display.



<< 5. Connect and tighten the Velcro straps at the back of the display.

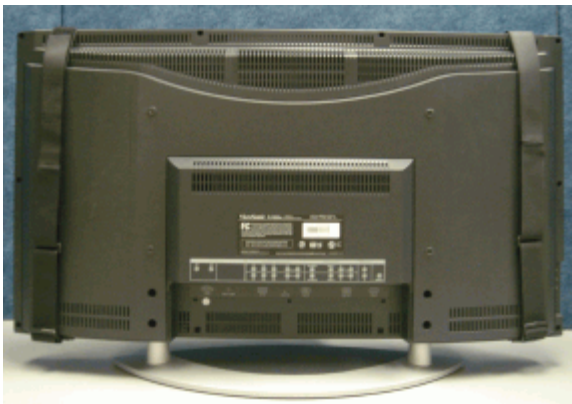

6. After two vertical Velcro straps are tightened; use the long Velcro strap to pull these two vertical Velcro straps toward the center to make them tighter.



7. Install the driver and controller as instructed in user's manual. Plug the touch screen cable into the controller. Run the calibration program and test the touch screen.